

TO UNROLL SKED® STRETCHER AND LAY FLAT




1, REMOVE SKED® FROM PACK AND PLACE ON GROUND.



2, UNFASTEN RETAINER STRAP. STEP ON FOOT END OF SKED® AND UNROLL COMPLETELY TO OPPOSITE END.



3, BEND THE SKED® OVER YOUR FOREARM AND BACK ROLL. REPEAT WITH OPPOSITE END OF STRETCHER. IN COLD WEATHER, IT MAY BE NECESSARY TO REVERSE ROLL IT TWICE.

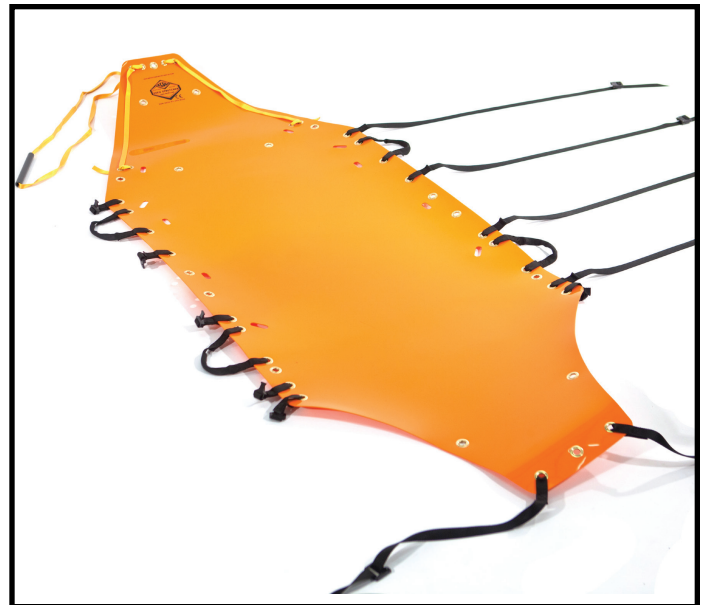

4, SKED® STRETCHER WILL NOW LAY FLAT.

ROLLING UP THE SKED® STRETCHER



1. LAY STRETCHER OUT FLAT WITH ALL CROSS STRAPS CONNECTED.

***STEEL DOUBLE BAR BUCKLES: PLACE RETAINER STRAP WITH INSIDE OF BUCKLE FACING UP UNDER FOOT END OF SKED®. (SEE PHOTO IN STEP 4)



2. STARTING AT THE HEAD END, ROLL THE SKED® UP AS TIGHT AS POSSIBLE. CONTINUE TO ROLL THE SKED® USING KNEE TO KEEP THE ROLLED STRETCHER SMALL.



3. WHILE HOLDING YOUR KNEE ON THE ROLLED SKED®, FASTEN THE COBRA BUCKLES OF THE FOOT END STRAPS TO HOLD THE SKED® IN A TIGHT ROLL.



4. WHEN USING THE SKED® WITH STEEL DOUBLE BAR BUCKLES, FASTEN THE PRE-PLACED RETAINER STRAP TO BUCKLE AND PLACE SKED® STRETCHER IN BACKPACK.